



# TECHNICAL SPECIFICATIONS

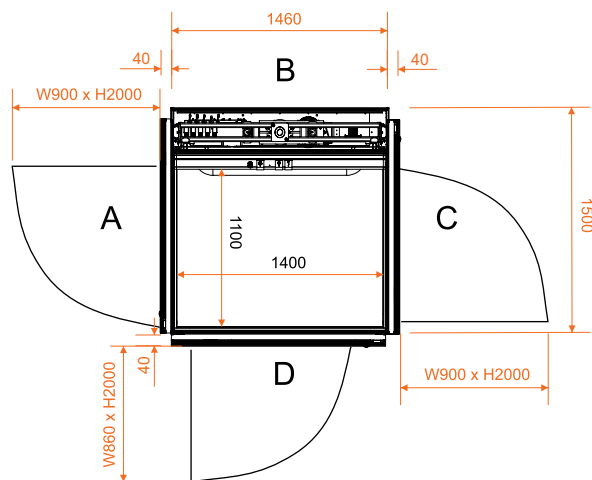


## STANDARD PLATFORM LIFT 1100 X 1400

System	Screw-driven
Rated load	400 kg
Speed	0,15 m/sec (9 m/min)
Platform dimensions	1100 x 1400 mm
Shaft dimensions	1500 x 1460 mm
Structural opening	1540 x 1500 mm
Required opening for the door	W (shaft width) x H (decided door height) + 250 mm
Pit	50 mm
Power supply	380V, 3 phase or 230V, 1 phase

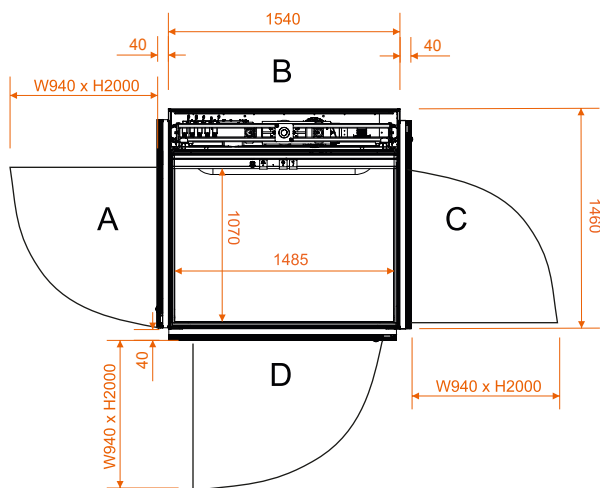

## STANDARD PLATFORM LIFT 1070 X 1485

System	Screw-driven
Rated load	400 kg
Speed	0,15 m/sec (9 m/min)
Platform dimensions	1070 x 1485 mm
Shaft dimensions	1460 x 1540 mm
Structural opening	1500 x 1580 mm
Required opening for the door	W (shaft width) x H (decided door height) + 250 mm
Pit	50 mm
Power supply	380V, 3 phase or 230V, 1 phase

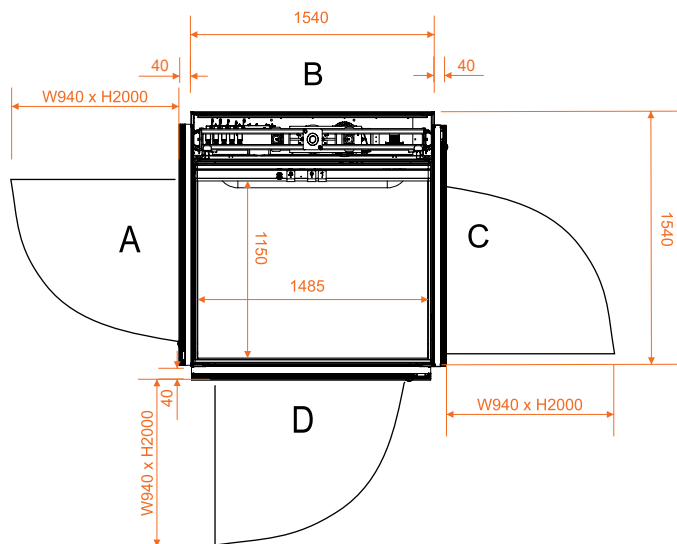

## STANDARD PLATFORM LIFT 1150 X 1485

System	Screw-driven
Rated load	400 kg
Speed	0,15 m/sec (9 m/min)
Platform dimensions	1150 x 1485 mm
Shaft dimensions	1540 x 1540 mm
Structural opening	1580 x 1580 mm
Required opening for the door	W (shaft width) x H (decided door height) + 250 mm
Pit	50 mm
Power supply	380V, 3 phase or 230V, 1 phase


# CUSTOMISATION

## COLOUR CUSTOMISATION

The whole lift can be painted in almost any colour to suit your taste and environment. You can choose from hundreds of RAL palette colours available.



## PANELS

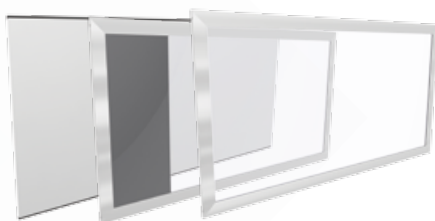


Platform lift shaft can be assembled using multi-layered sandwich panels and laminated glass panels.

## ADDITIONAL OPTIONS

- Automatic door openers
- Additional floor indicators
- LED lighting
- Extra lighting options
- Voice announcer, musical theme
- Jump seat
- Ramp
- Electrical outlets for recharging wheelchairs and other equipment
- Two-way wired or wireless speakerphone on the platform
- Electronic contact and non-contact keys
- Remote control

## DIFFERENT DOOR TYPES

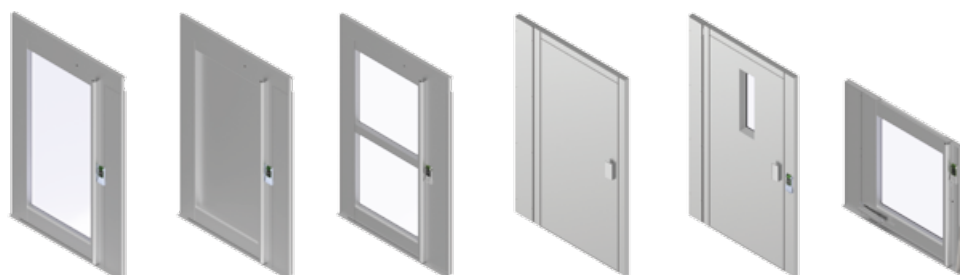

Door type	Aluminum with glass (standard)	Aluminum	Impost	Fire proof EI60	Fire proof EW60 – with a small window	Gates
Clear door opening size mm, (WxH)	940x2000*	940x2000*	940x2000*	900x2000*	900x2000*	940x1300
Glass size mm, (WxH)	774x1705	-	774x926	-	100x600	774x926
Door finish	Anodized aluminium	Anodized aluminium	Anodized aluminium	Painted steel	Painted steel	Anodized aluminium
Frame/RAL colour	Anodized aluminium	Anodized aluminium	Anodized aluminium	RAL 9006	RAL 9006	Anodized aluminium
Inbuilt door closer	STD	STD	STD	STD	STD	STD
Automatic door opener	Internal or external as option	Internal or external as option	Internal or external as option	Internal or external as option	Internal or external as option	Internal or external as option
Door handle	Integrated in the door leaf	Integrated in the door leaf	Integrated in the door leaf	Placed external	Placed external	Integrated in the door leaf

\* Door height of between 1800 to 2300 mm available as an extra option.